



- Rated load: 200A at 60VDC
- 120VDC with magnet arc blow-out option
- Auxiliary contact option
- SPST, SPDT, DPST-NO, DPDT versions
- Motor reverser
- Bi-stable (Latching) option - SPST only



## Contacts

Contact arrangement	SPST-NO-DM, SPDT, DPST-NO-DM, DPDT	
Contact material	AgCu Alloy	
Max. switching voltage	DC	60V, 120V with magnet arc blow-out
Rated load (resistive, cos φ=1)	DC1	200A 60VDC
Terminal temperature rise above ambient	<70°C. IEC EN60947, GB14/14048.4	
Contact voltage drop	max.	≤ 80mV @ 200A
Auxiliary Contact (when fitted)	arrangement	SPST-NO (1 Form A) + SPST-NC
(not available for DPDT)	max. current	5A @ 24VDC / 2A @ 48VDC
	min. current	100mA @ 5V

## Coil

Nominal Voltage (see page 2)	DC	12 ~ 120VDC (Tables 1 & 2)
Rated power consumption	hold	10 ~ 20W (non-latching type)
	initial	14 ~ 45W (latching)
Working duty	non-latch	continuous
Minimum pulse length	latch	200ms
Maximum operating frequency	latch coil	6 ops./min. square wave pulse

## Insulation

Insulation resistance	Initial	100MΩ (min.) @ 500VDC
Dielectric strength	coil to contact	1000V <sub>rms</sub> (50/60Hz) / <1mA / 1 min (at sea level)
	contact to contact	1000V <sub>rms</sub> (50/60Hz, 1min, <1mA leakage)

## General Data

Operate / bounce time at 20°C	max.	30ms / 3ms
Release time	max.	30ms
Electrical life	at rated load	20,000 ops
Mechanical life	no load	100,000 ops

## Environmental

Ambient temperature	operating	-25°C to +65°C (Latching), +85°C (non-Latching)
Shock resistance		20g peak, 11ms 1/2 sine
Vibration resistance		3g sine peak (1-50Hz 0.5mm amplitude)
Relative humidity	RH	20% ~ 90%
Dimensions	L x W x H	Various - see dimensional drawings
Weight	approx.	Various according to option and style

## Ordering Code

D S C 2 0 M - 4 0 2 1 - 2 8 - 1 0 2 4 - S D W

### DSC Series

20: Standard

20M: Magnet arc blow-out

### Coil codes

See tables 1 & 2

### Contact arrangement

4011: SPDT (C/O) (1 Form C (1Z) non latching)

4012: Motor reverser (2 Form C (2Z) non latching)

4021: SPST-NO (1 Form A (H) and latching SPST)

4022: DPST-NO-DM (2 Form A (2H) non latching)

### Body style

28: Open frame, male stud terminals

### Accessory options

Blank: No option

C: Dust cover IP40 (not available for 4022 contact option)

S: Auxiliary switch (not available for 4012 contact option)

D: Parallel back EMF diode suppression (standard coils)

T: Parallel TVS back EMF suppression diode (bi-stable coils)

### Mounting & terminations

Blank: No bracket

W: 'W' shaped mounting bracket

1L: 'L' shaped mounting bracket

2L: 2 x 'L' shaped mounting brackets

2P: 2 x 'P' shaped mounting brackets

Coil Data - Standard (monostable) coil

Table 1

Coil code	Nominal voltage $U_s$ (VDC)	Recommended coil operating range (V)	Must operate max. voltage (VDC)	Must release voltage min. (VDC)	Starting current (A)	Coil power (W)
1012	12	0.85 $U_s$ ~ 1.2 $U_s$	≤ 8.4	≥ 1.2	≤ 1.2	10 ~ 20W
1024	24		≤ 16.8	≥ 2.4	≤ 0.6	
1030	30		≤ 21.0	≥ 3.0	≤ 0.5	
1036	36		≤ 25.2	≥ 3.6	≤ 0.4	
1048	48		≤ 33.6	≥ 4.8	≤ 0.3	
1060	60		≤ 42.0	≥ 6.0	≤ 0.25	
1072	72		≤ 50.4	≥ 7.2	≤ 0.2	
1080	80		≤ 56.0	≥ 8.0	≤ 0.15	
1096	96		≤ 67.2	≥ 9.6	≤ 0.15	
1120	120		≤ 84.0	≥ 12.0	≤ 0.15	

Coil Data - Single coil latch (bi-stable). Reverse polarity through coil to unlatch. SPST-NO-DM only


Table 2

Coil code	Nominal voltage $U_s$ (VDC)	Recommended coil operating range (V)	Must operate max. voltage (VDC)	Must release voltage min. (VDC)	Starting current (A)	Coil power (W)
SL12	12	0.85 $U_s$ ~ 1.2 $U_s$	≤ 9.6	≤ 9.6	≤ 1.20	Initial 14 ~ 45W  Pulse length 0.5 ~ 1 sec.
SL24	24		≤ 19.2	≤ 19.2	≤ 0.70	
SL30	30		≤ 24.0	≤ 24.0	≤ 0.65	
SL36	36		≤ 28.8	≤ 28.8	≤ 0.65	
SL48	48		≤ 38.4	≤ 38.4	≤ 0.70	
SL60	60		≤ 48.0	≤ 48.0	≤ 0.60	
SL72	72		≤ 57.6	≤ 57.6	≤ 0.50	
SL80	80		≤ 64.0	≤ 64.0	≤ 0.40	
SL96	96		≤ 76.8	≤ 76.8	≤ 0.35	
SL120	120		≤ 96.0	≤ 96.0	≤ 0.35	

Other coils available upon special request. MOQ's will apply.

Dimensions (mm)



Fig. 1

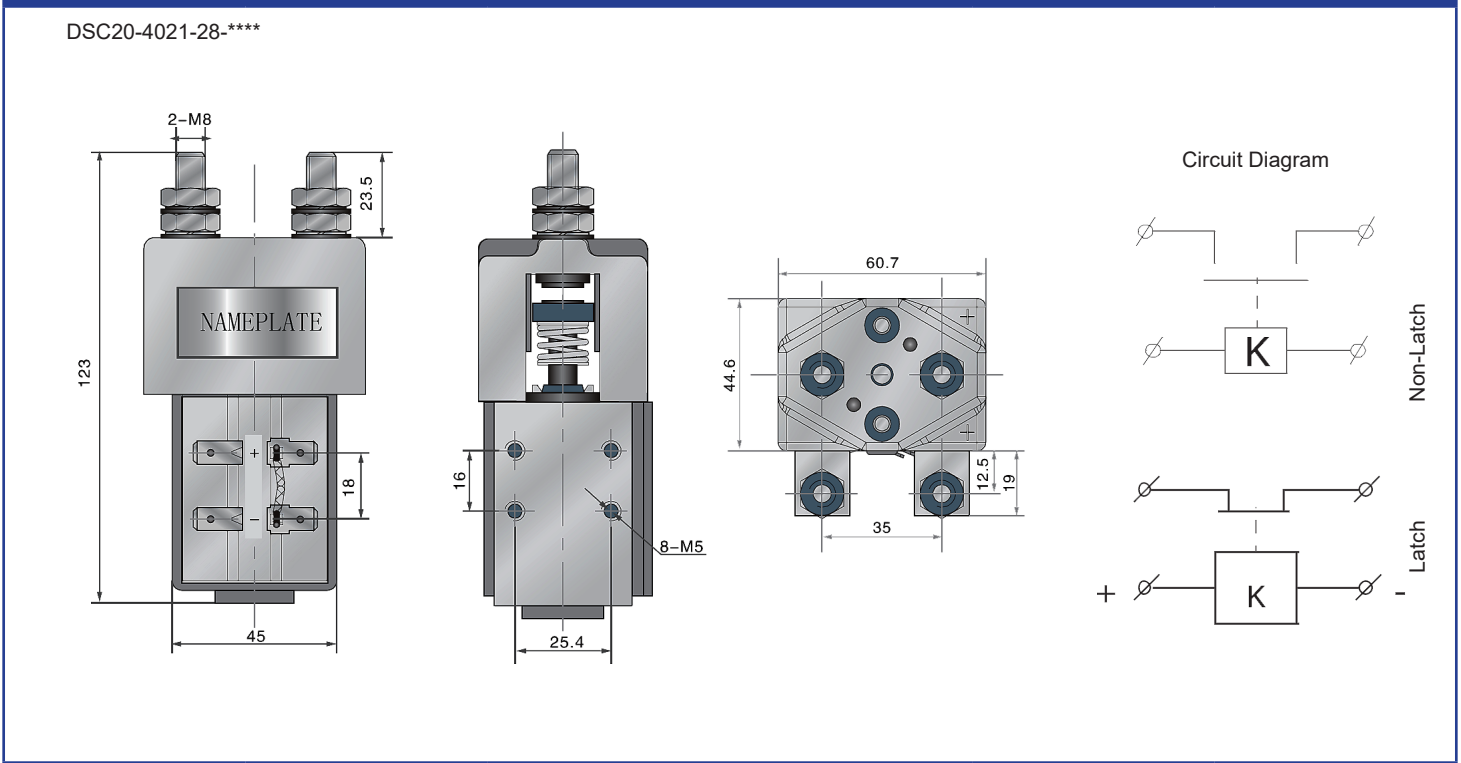


Dimensions (mm)

Fig. 2


DSC20-4021-28-\*\*\*\*-S-\*\*

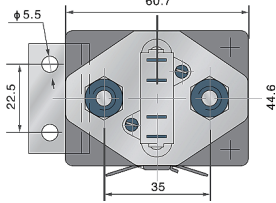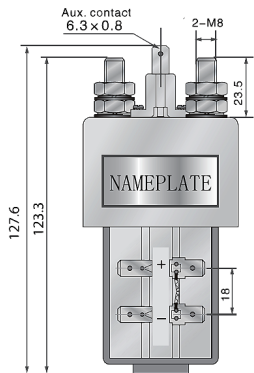

1L mounting bracket (2L is both sides)

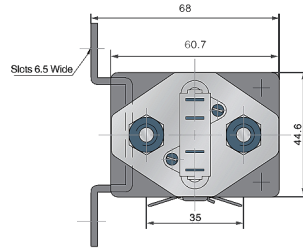


W mounting bracket



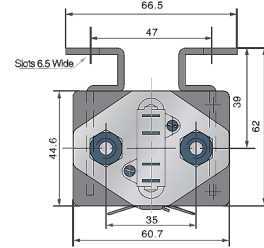


2P mounting bracket


Circuit Diagram

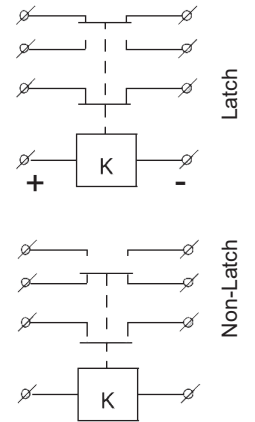




DSC20-4011-28-\*\*\*\*-\*\*

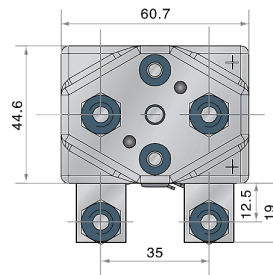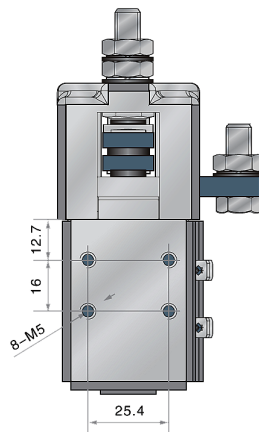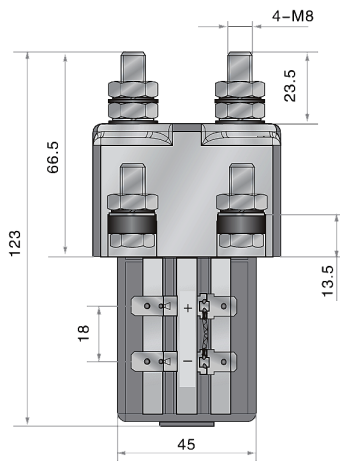


Circuit Diagram



DSC20-4011-28-\*\*\*\*-S-\*\*

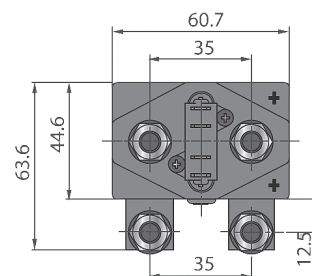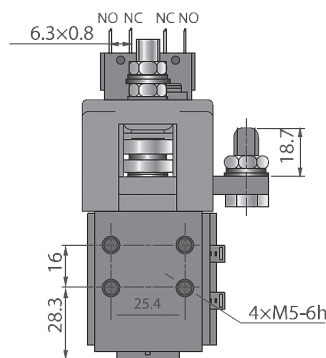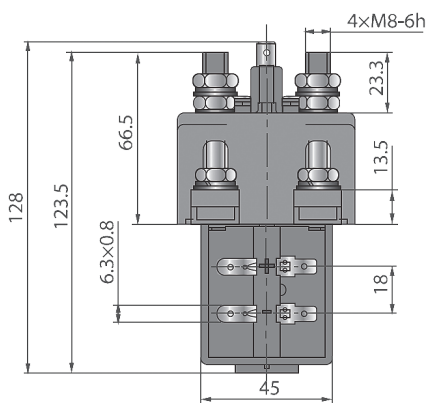


Circuit Diagram

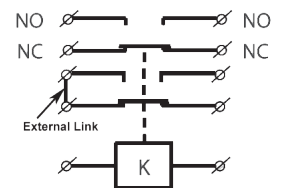


Dimensions (mm)

Fig. 3


DSC20-4022-28-\*\*\*\*-\*\*

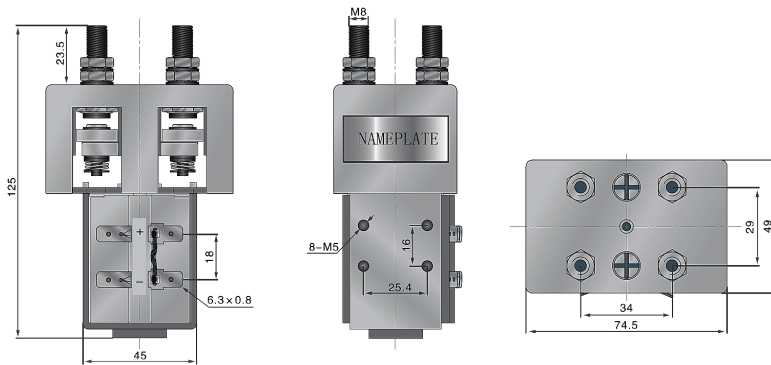


Circuit Diagram




DSC20-4022-28-\*\*\*\*-S-\*\*

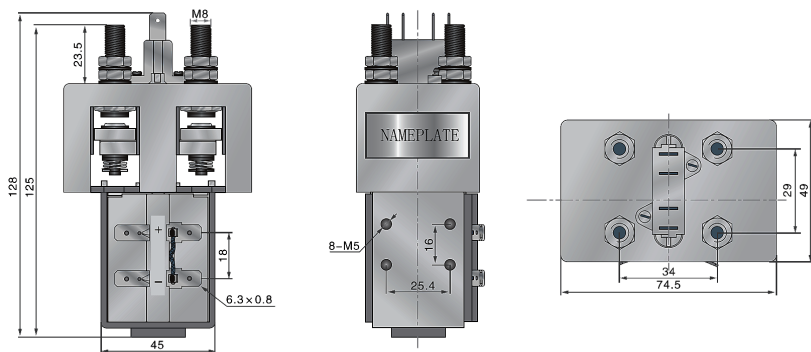


Circuit Diagram

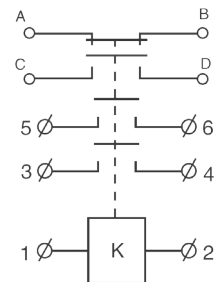


DSC20-4012-28-\*\*\*\*

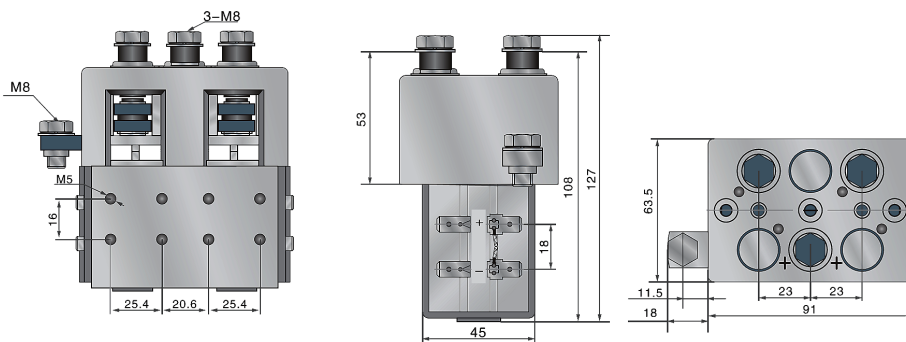

Circuit Diagram

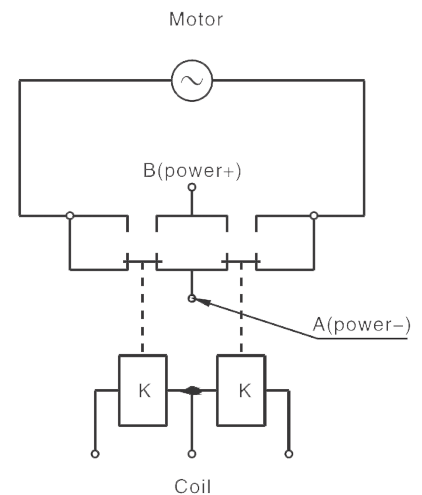

DSC20-4012-28-\*\*\*\*-2L

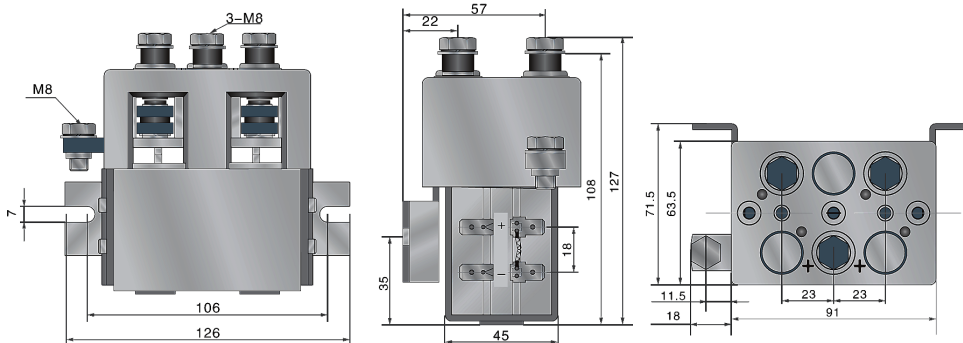

Notes:

- 1: Note coil polarity for latching operation.
- 2: Observe contact polarity as indicated.
- 3: Tolerances (nominal),  
 <10mm: ± 0.3mm, 10 ~ 50mm: ± 0.6mm,  
 >50mm: ± 1.0mm.