



- Up to 40A / 250VAC Continuous rating
- Single coil & twin coil latching
- Utility meters
- Automotive / Electric vehicle battery

RoHS  
Compliant ✓

### Contacts

Contact arrangement	SPST-NO (1 NO)
Contact material	AgSnO <sub>2</sub>
Max. switching voltage	250VAC / 20VDC
Min. switching current / voltage	500mA/12VDC
Max. continuous current	40A
Max. switching current	40A
Max. switching power	10000VA
Initial resistance	≤ 10mΩ, max. at 0.1A/6VDC

### Coil

Rated voltage	9...48VDC
Operating range of supply voltage	See table 1
Rated power consumption	single coil 1.0W
Rated power consumption	twin coil 2.0W

### Insulation (EN 60664-1)

Insulation resistance	>500MΩ at 500VDC, 50%RH
Dielectric strength	coil to contact 4000Vrms, 1min (50Hz)
	between open contacts 1000Vrms, 1min (50Hz)
Creepage & Clearance	8mm

### General Data

Operating time	max.	20ms
Release time	max.	20ms
Electrical life (resistive)	ops.	1 x 10 <sup>4</sup>
Mechanical life	ops.	1 x 10 <sup>6</sup>

### Environmental

Ambient temperature	operating	-40 to 70°C (Class F)
	storage	-40 to 70°C
Humidity		98%RH, 40°C
Shock resistance	functional	100m/s <sup>2</sup> 11ms
	destructive	1000m/s <sup>2</sup>
Vibration resistance		DA 1.5mm 10-55Hz
Dimensions	L x W x H	39 x 29 x 15mm
Weight	approx.	≤ 40g

### Ordering Code

D G 7 5 - 3 0 2 1 - 7 2 - T L 1 2 -

Series

Coil code:

See table 1

Contact material

30: AgSnO<sub>2</sub>

Contact arrangement

21: SPST-NO (1NO)\*

31: SPST-NC (1NC)\*

\* As delivered condition

Environmental protection

7: Covered, dust cover

Mounting & terminations\*

1: PCB coil terminals + weld terminals for contacts

Straight power terminals

2: PCB coil terminals + weld terminals for contacts

Bent power terminals

\* Terminals are highly customizable.  
Please contact factory.

Options

Blank: Standard

P\*\*\* : Custom (\*\*\*) = unique identifier

### DC Coil Data


Table 1

Coil voltage code		Nominal voltage (VDC)	Coil resistance ( $\Omega$ ) $\pm 10\%$		Must operate voltage (VDC)	Recommended operate pulse length
Single coil	Twin coil*		Single coil (1.5W)	Twin coil* (3.0W)		
SL09	TL09	9	54	27 + 27	6.75	50ms
SL12	TL12	12	96	48 + 48	9	
SL24	TL24	24	384	192 + 192	19	
SL48	TL48	48	1536	768 + 768	36	

\* NB: Latch & Reset coils must not be powered simultaneously.


### Overall Dimensions mm

Fig. 1

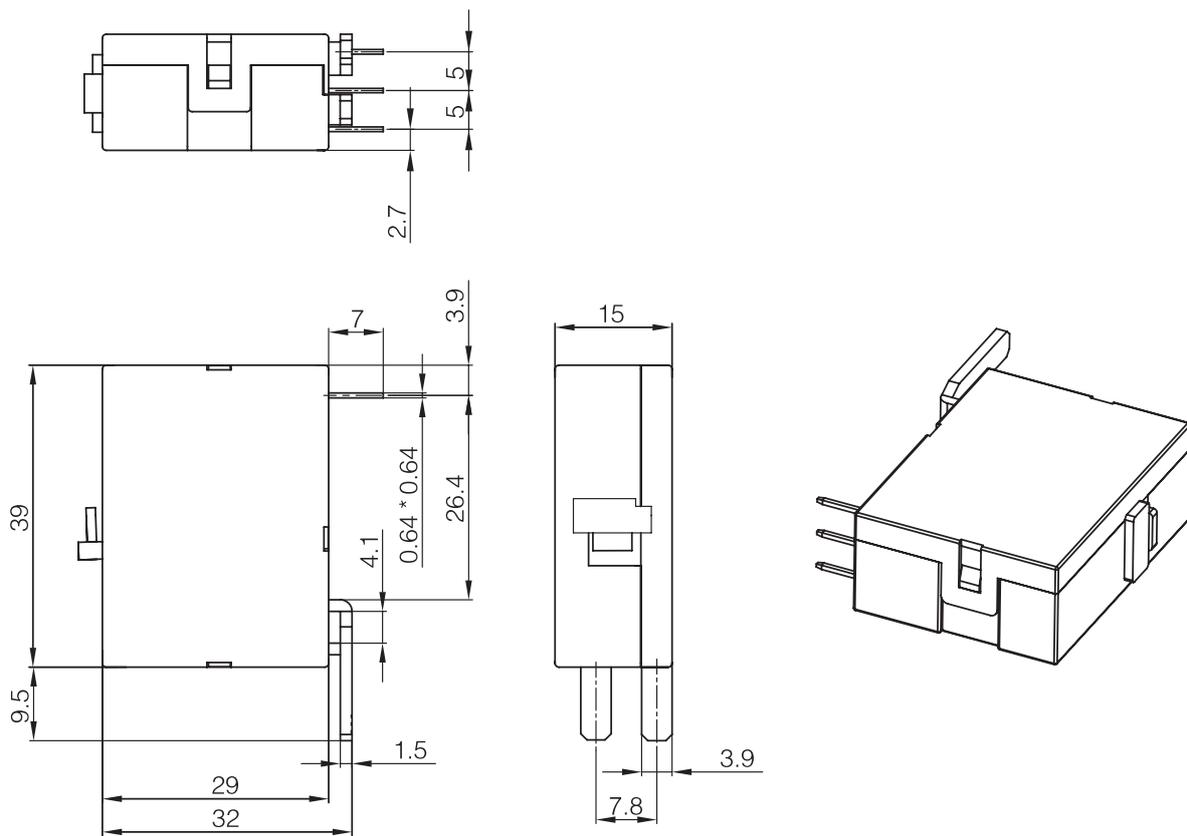


### Wiring Diagrams

Fig. 2

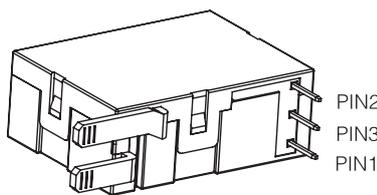

Pin 3 not fitted for single coil latch.

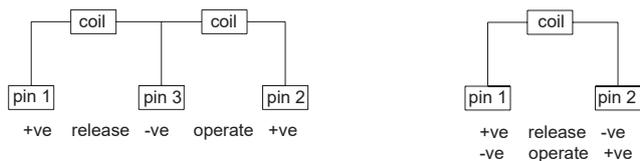

### Notes:

1) All parameters, unless otherwise specified, are measured at an ambient temperature of 23°C.