

- High continuous DC current capacity - 100A
- General purpose automotive or industrial relays
- High inrush capabilities
- PCB Mounting option
- Ideal for DC Motor Control
- Industry standard size and footprint

RoHS Compliant

## Contacts

Contact arrangement	SPST-NO (1 Form A)
Contact material	AgSnOInO
Max. switching voltage	DC 30VDC (current dependent - see fig.3)
Max. continuous current	100A
Max. switching current <sup>3</sup>	make 240A
Max. switching current	break 100A
Min. switching current	0.1A 12VDC
Contact gap	>0.5mm
Initial resistance	<100mΩ, max. at 0.1A/6VDC

## Coil

Nominal voltage	DC 6...24V
Must release voltage	≥0.1Un
Operating range of supply voltage	See table 1
Rated power consumption	DC 1.6W; 1.81W with resistor

## Insulation

Insulation resistance	100MΩ at 500VDC, 50%RH
Dielectric strength	coil to contact 500Vrms, 1min
	open contacts 500Vrms, 1min

## General Data

Operating time	typ. 7ms
Release time	typ. 2ms
Electrical life <sup>2</sup>	ops. 1 x 10 <sup>5</sup>
Mechanical life	ops. 1 x 10 <sup>7</sup>

## Environmental

Ambient temperature	operating	-40 to 125°C (Above 85°C - consult factory)
	storage	-40 to +155°C
Shock resistance	functional	20g, 11ms
	destructive	100g
Vibration resistance	DA1.27mm 10-40Hz / 40-70Hz:	5g
	DA0.5mm 100-500Hz:	10g
Dimensions	L x W x H	28.3 x 28.3 x 25.0 mm (excluding terminals)
Weight	approx.	40g depending on mounting

## Ordering Code

D G 8 5 D - 7 0 2 1 - 9 6 - 1 0 1 2 - M 1 D R

### Series

### Contact material

70: AgSnOInO

### Contact arrangement

21: SPST-NO (1 N/O, 1 Form A)

### Environmental protection

3: In cover, sealed (IP67)

7: In cover, dust cover (IP54)

9: Cover with mounting bracket. (integral plastic, unless optional metal bracket selected), (IP54)

### Connection mode

5: for PCB

6: Flat blades

### Mounting & terminations

Blank: No options

M1: Metal bracket

M2: Bent metal bracket

S1: Skirted cover & metal bracket

S2: Skirted cover & bent metal bracket

### Parallel component options

Blank: No option

R: Integral resistor

D: Integral diode +85/-86

DR: Integral diode reversed -85/+86 - standard

### Order code examples

DG85D-7021-75-1012 = unsealed, pcb, no bracket

DG85D-7021-76-1012 = unsealed, no bracket (standard)

DG85D-7021-36-1012 = sealed, no bracket

DG85D-7021-36-1012-M1 = sealed, metal bracket


DG85D-7021-96-1012 = unsealed, plastic bracket

DG85D-7021-96-1012-M1 = unsealed, metal bracket




## Wiring Diagrams

Fig. 2

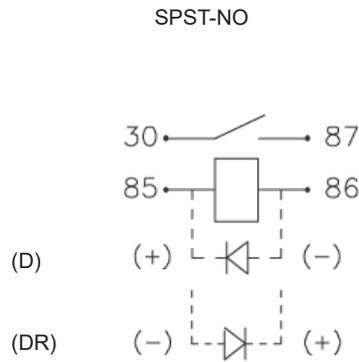

## Max. DC resistive load breaking capacity

Fig. 3

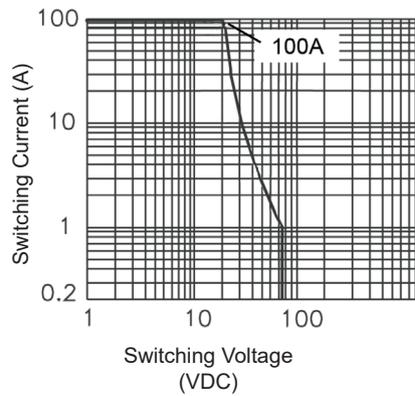

### Notes:

- 1: All parameters, unless otherwise specified, are measured at ambient temperature of 23°C.
- 2: Electrical life obtained at resistive or inductive load at 100A, 15VDC with suitable arc suppression circuit attached and with operating frequency of 1 op/sec.
- 3: Maximum make current refers to lamp load inrush current.