



- Plug-in Jumper Link to replace relay (no coil)
- High continuous DC current capacity
- Industry standard terminal arrangement to fit Macro ISO style sockets (9.5mm terminals)

RoHS
Compliant ✓

Contacts

Contact arrangement	SPST-NC (Link only)
Max. continuous current	100A
Rated voltage	DC1 24VDC max.

Insulation

Insulation resistance	100MΩ at 500VDC, 50%RH, 25°C
-----------------------	------------------------------

Environmental

Environmental protection	IP54 Dust Cover
Ambient temperature	operating -40 to +125°C
	storage -40 to +125°C
Dimensions	L x W x H 28.3 x 28.3 x 25mm (excluding terminals)
Weight	approx 25g

Ordering Code

D G 8 5 D - J M P R

Series


Jumper

JMPR: Wire link

Dimensions

Fig. 1

Dimensions in mm

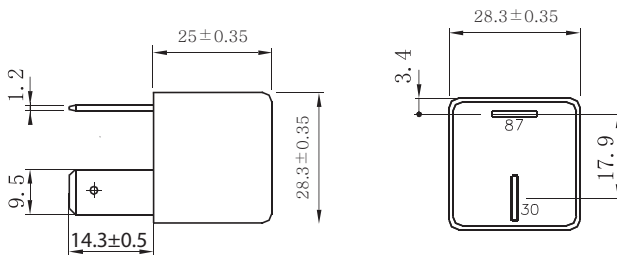

Circuit diagram

Fig. 2

