



- High load voltage - up to 480VAC
- 4 - 32VDC or 90 - 250VAC Control voltage
- Zero crossover switching
- LED Control input indicator
- Integrated heatsink
- DIN Rail or chassis mounting



Ordering Code

S D A 1 Z - 1 0 K - D

Series

Switching

Z: Zero Crossover

Load current

10: 10A

15: 15A

Load voltage

K: 40 to 480VAC

Control voltage input

D: 4 ~ 32VDC

Output (Load)

Load type	SPST-NO (1 N/O) Resistive	
Load current	10A, 15A	
Load switching voltage	AC V_{rms}	40 ~ 480V
Maximum peak voltage	AC V_{pt}	900V
Minimum load current	0.1A	
Inrush current (max.)	10ms	10A: 120A / 15A: 160A
I^2t	A^2s	10A: 72A ² s / 15A: 128A ² s
Switch type	Zero crossover	

Input (control)

Control voltage	VDC	4 ~ 32
Control current	mA	<20
Turn-on voltage (min.)	V_{min}	DC: 3.5V
Turn-on voltage (max.)	V_{max}	DC: 35V
Turn-off voltage	V	DC: 2

Environmental

Dimensions	L x W x H	100 x 24 x 107mm
Weight	approx.	228g

Note:

All SSR's should be protected by fast acting "semiconductor" fuses.


Circuit breakers and normal fuses are not quick enough to protect the SSR in the event of a current surge or spike"

It is recommended that load power is kept to no more than 70% of the SSR's rating to avoid unexpected issues in the event of variations in the load and ambient temperature" These SSR's are designed to be used with a suitable heat sink.

Transfer Pads and Heatsinks for Durakool SSR relays can be found in Durakool's Solid State Relay (SSR) catalogue.

Schematic

Fig. 1

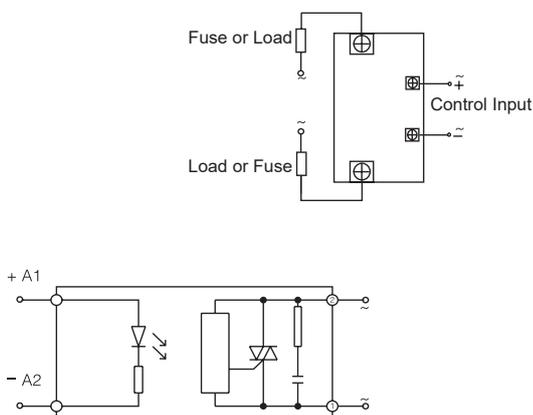

Dimensions mm

Fig. 2

