

NOT FOR NEW DESIGN



- High load voltage - up to 480VAC
- 4 - 32VDC or 90 - 250VAC Control voltage
- Three phase, zero crossover switching
- LED Control input indicator
- Integrated heatsink
- DIN Rail or chassis mounting

UK
CA
CE
c
AL
US
E325835

RoHS
Compliant

Output (Load)

Load type	3PST-NO (3 N/O) Resistive
Load current	10A, 15A
Load switching voltage	AC V_{rms} 40 ~ 480V
Maximum peak voltage	AC V_{pt} 900V
Minimum load current	0.1A
Inrush current (max.)	10ms 10A: 120A / 15A: 160A
I^2t	A ² s 10A: 72 / 15A: 128
Switch type	Zero crossover

Input (control)

Control voltage	VDC DC: 4 ~ 32DC / AC: 90 ~ 250AC
Control current	mA <25
Turn-on voltage (min.)	V_{min} DC: 3.5VDC / AC: 80VAC
Turn-on voltage (max.)	V_{max} DC: 35VDC / AC: 280VAC
Turn-off voltage	V DC: 2VDC / AC: 40VAC

Environmental

Dimensions	L x W x H 100 x 110 x 80mm
Weight	approx. 672g

Note:

- All SSR's should be protected by fast acting "semiconductor" fuses.
- Circuit breakers and normal fuses are not quick enough to protect the SSR in the event of a current surge or spike"
- It is recommended that load power is kept to no more than 70% of the SSR's rating to avoid unexpected issues in the event of variations in the load and ambient temperature" These SSR's are designed to be used with a suitable heat sink.
- Transfer Pads and Heatsinks for Durakool SSR relays can be found in Durakool's Solid State Relay (SSR) catalogue.

Ordering Code

S D A 3 Z - 1 0 K - D

Series

Switching

Z: Zero Crossover

Load current

10: 10A

15: 15A

Load voltage

K: 40 to 480VAC


Control voltage input

A: 90 ~ 250VAC

D: 4 ~ 32VDC

Schematic

Fig. 1

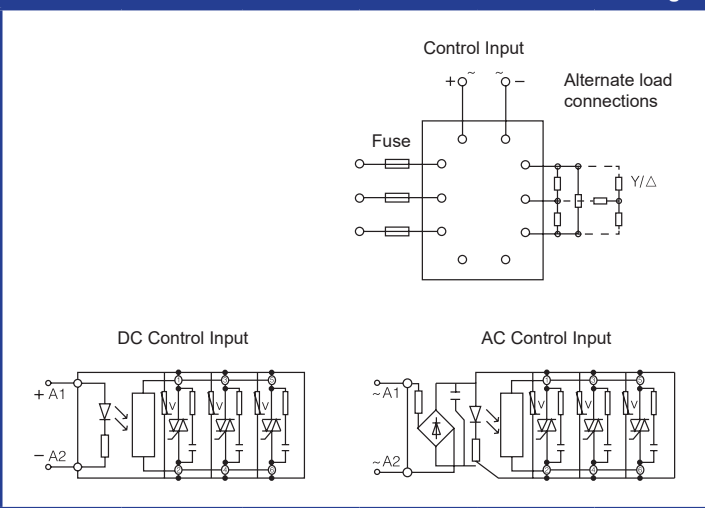

Dimensions mm

Fig. 2

