



- 300A Continuous
- Max. breaking current = 2000A
- Magnet arc blowout
- Non-polarised contacts
- Optional auxiliary contact
- Male or female power terminals
- Side or bottom mount
- PWM or twin coil economiser

#### Contacts

Contact arrangement	SPST-NO-DM
Contact material	Oxygen Free Copper ( Cu. C10200)
Max. switching voltage	DC 1000VDC (current dependent - see fig. 1)
Rated load (resistive, $\cos \phi=1$ )	DC1 300A
	60 mins 450A
	20 mins 600A
	30 secs 1000A
Max continuous thermal current	DC1 500A with 300mm <sup>2</sup> , or larger, conductors
Max switching current	1 time only 2000A @ 320VDC
Terminal temperature rise above ambient	<70°C. IEC EN60947 GB14/14048.4
Contact voltage drop	max. 120mV @ 300A
Auxiliary contact (when fitted)	arrangement SPST-NO (1 Form A)
	max. current 2A @ 24VDC / 3A @ 125VAC
	min. current 100mA @ 8V

#### Coil

Nominal voltage	DC 12VDC, 24VDC, 9 ~ 36VDC, - see Tables 1 & 2
Rated power consumption	hold PWM: 2W / Twin Coil: 6W approx.

#### Insulation

Insulation resistance	initial >100MΩ @1000VDC
	life end 50MΩ (Min.)
Dielectric strength	coil to contact 3000Vrms / <1mA / 1 min (at sea level)
	contact to contact 1500Vrms / <1mA / 1 min (at sea level)

#### General Data

Operating time at 20°C	max. 30ms
Release time at 20°C	max. 10ms
Bounce time at 20°C	max. 5ms
Electrical life	at rated load Refer to Fig. 1, Page 2
Mechanical life	3 x 10 <sup>5</sup>

#### Environmental

Ambient temperature	operating -40 to +85°C
Relative humidity	20 to 90%RH
Shock resistance	≤ 20G peak, 11ms 1/2 sine, peak
Vibration resistance	5g (10 ~ 500Hz, peak)
Dimensions	see Figs. 4 & 5 (Page 3)
Weight	approx. ≥450g (will vary according to option)



#### Ordering Code

D H V C 3 0 0 - 4 0 8 1 - S 8 - 0 9 3 6 - R 1

##### Series

##### Coil code:

See Tables  
1 & 2

##### Contact material

40: Cu. C10200

##### Contact arrangement

81: SPST-NO

91: SPST-NO + Auxiliary

Contacts are not polarised.

##### Mounting & terminations

Bottom mount

B8: M8 male stud power terminals

B9: M6 female power terminals

Side mount

S8: M8 male stud power terminals

S9: M6 female power terminals

##### Coil wire & auxiliary wire (when fitted) length

R: 390mm (standard)

T: 150mm

(Other lengths to special order)

##### Coil wire & auxiliary contact termination

1: None (bare ends)

3: 2 position "Mini-fit" female on coil wires (see Fig. 3)

(Other terminations to special order)

▲ NB: UL ratings may differ and not all variants are UL approved. Contact Durakool for more information.

**Coil Data (with PWM economiser)**

**Table 1**

Coil code	Nominal voltage (V DC) $U_s$	Coil operating range (V DC)	Must operate voltage max. (V DC)	Must release voltage (V DC)	Starting current (A)	Maintain (hold) current (A)
1236	9 ~ 36	9 ~ 36	8 ~ 9	5.5 ~ 7.0	2.4A @ 12V 2.0A @ 24V	0.18 @ 12V 0.09 @ 24V
3295	32 ~ 95	32 ~ 95	29 ~ 31	23 ~ 25	1.3A	0.03 @ 48V

PWM Coil economiser: no additional coil surge suppression required. Coil terminals are polarized.



**Coil Data (Twin coil economiser)**

**Table 2**

Coil code	Nominal voltage (V DC) $U_s$	Coil operating range (V DC)	Must operate voltage max. (V DC)	Must release voltage (V DC)	Starting current (A)	Power dissipation (W)
D012	12	9 ~ 16	9.00	1.2	3.8	6
D024	24	18 ~ 32	18.00	2.4	1.9	6

**Electrical performance**

**Fig. 1**

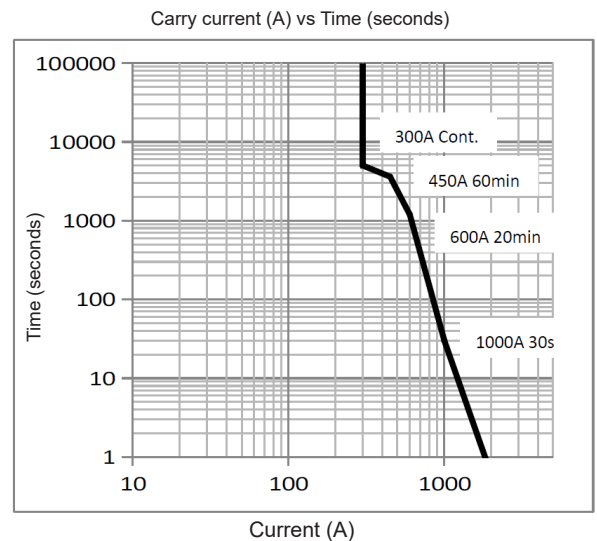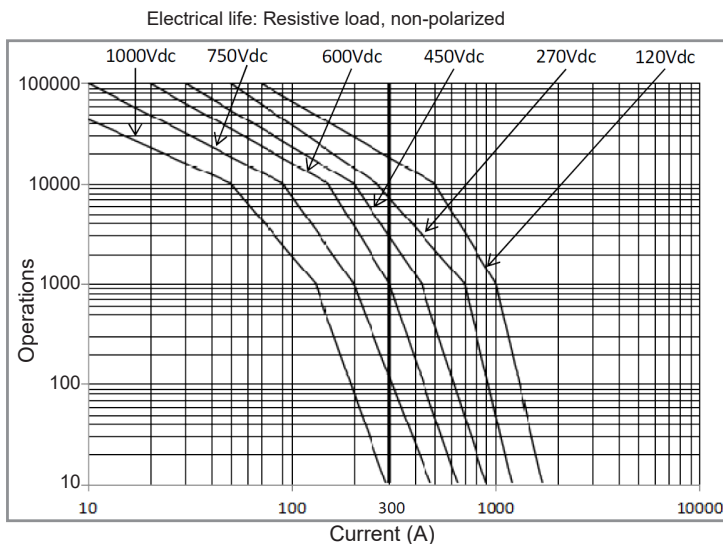

Recommended conductor size of 120mm<sup>2</sup> and terminal temperature rise maximum in accordance with ISO (EN) 60947.1 70°C.


Carry current is highly dependent upon conductor size.

Life estimates are based on tests and extrapolated data.

The user is advised to confirm the performance in their application.

**Connection Diagram**


**Fig. 2**




**Optional "Mini-fit" Connector**

**Fig. 3**

Connector for coil



- 1 = Coil lead +ve terminal (red)
- 2 = Coil lead -ve terminal (black)




Fitted socket type = SM-2A-HW  
Fitted terminal type = SMY-HW

Dimensions in mm


Dimensions - PWM type and Twin Coil are identical.

Fig. 4


Male terminals - bottom mount case

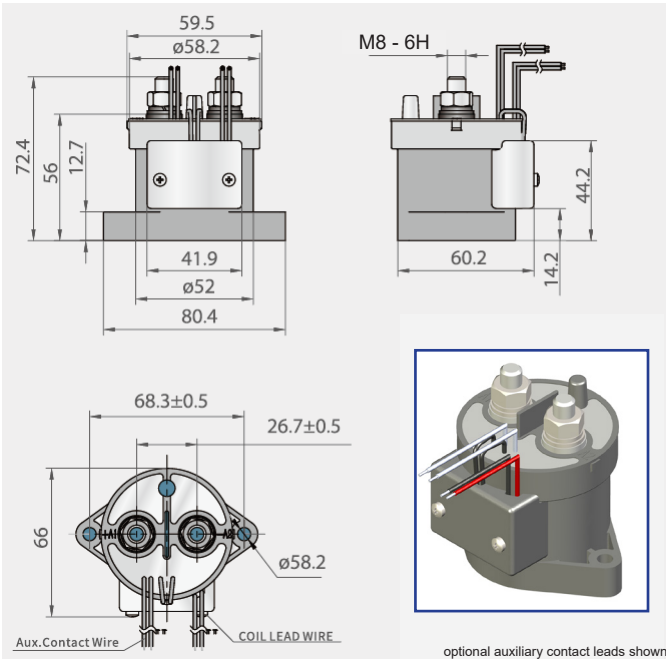


Male terminals - side mount case

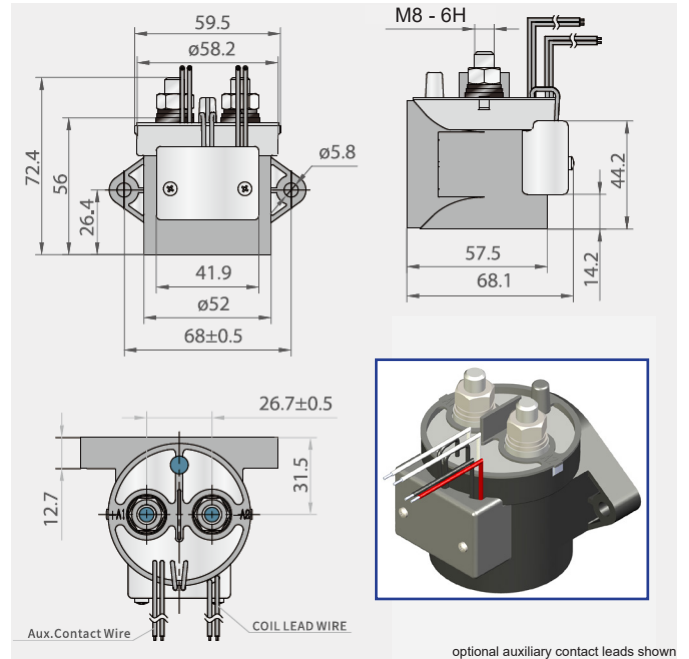

Female terminals - bottom mount case

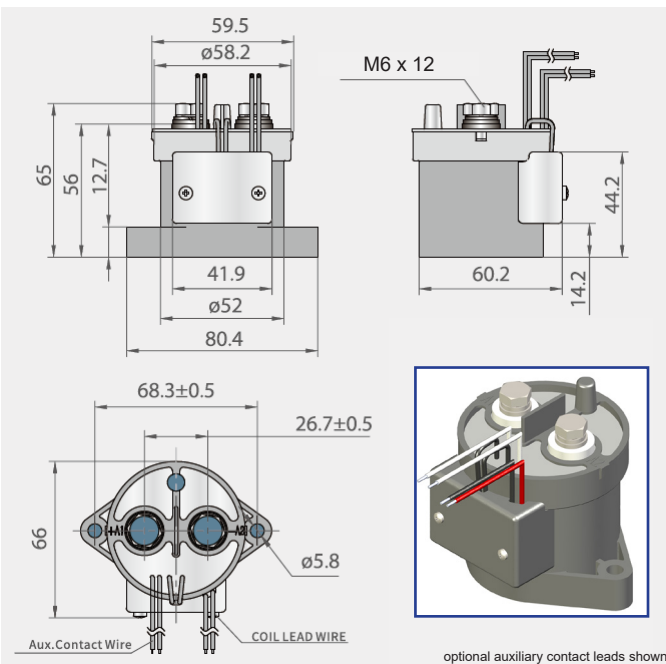

Female terminals - side mount case

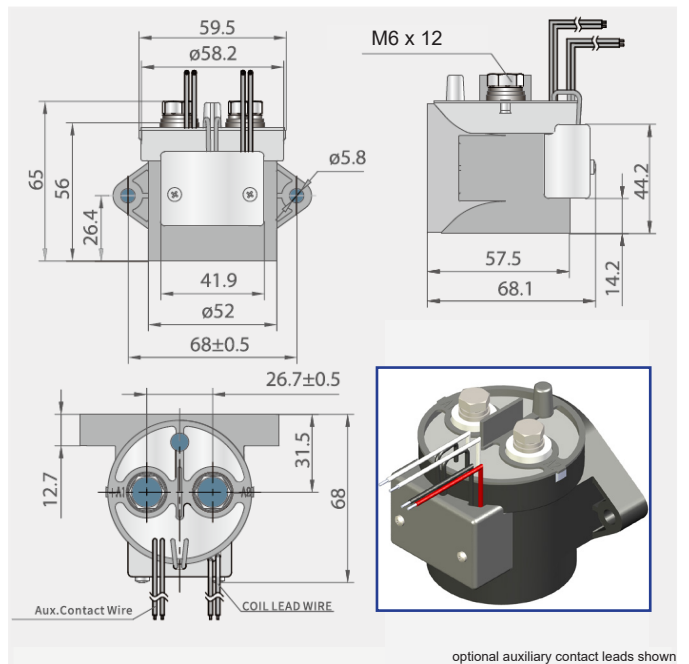

### Notes:

- 1: The maximum make current is 300A to avoid contact welding.
- 2: Nominal dimensions in mm. Tolerances (nominal), <10mm: ± 0.3mm, 10 ~ 50mm: ± 0.6mm, >50mm: ± 1.0mm.
- 3: Power contact (M8) nut torque = 8 ~ 10Nm, Power Contact (M6) nut torque = 6 ~ 8Nm; Installation/mounting torque = 1.7 ~ 3.5Nm.
- 4: Coil wire length and terminations can be customised upon request.
- 5: Coil and auxiliary contact wires: Teflon insulated UL1887 20AWG. Auxiliary Switch wires are white.
- 6: Main contacts should be connected with cable section of ≥ 300mm², if used at 500A maximum continuous thermal current.
- 7: The DHVC series has non-polarized contact terminals labeled "A1" and "A2" next to the main terminals. However, the coil terminals are polarized. Please connect the coil's red wire to the "+" terminal and the black wire to the "-" terminal.