

NOT FOR NEW DESIGN



- 30C 25FLA Definite purpose contactor
- Robust 1 - 4 pole contactor
- Arc covers as standard
- Industry standard mounting



Contacts

Contact arrangement	1 Form X (SPST-NO-DM) with/without shunt
	2 Form X (DPST-NO-DM)
	3 Form X (3PST-NO-DM)
	4 Form X (4PST-NO-DM)
Contact material	AgCdO, AgSnOInO

General Specifications

Initial operate time	ms	20
Release time (typical)	ms	10
Bounce time	ms	≤ 10
Arc cover		standard

Insulation

Insulation system		UL Class B 130°C
Initial dielectric strength	coil to contact	2200VAC
	pole to pole	2200VAC (includes shunt)
	between open contacts	2200VAC

Environmental

Ambient temperature	operating	-40 to +65°C			
		1 Pole	2 Pole	3 Pole	4 Pole
Weight	approx.	0.5lb	0.6lb	1.0lb	1.24lb

Terminations

Coil terminals	1 - 4 pole	0.250° QC + 6-32 screw (dual 0.25° QC optional)
		per terminal
Power terminals	1 - 2 pole	10-32 screw or 14-4 box lug + dual 0.25° QC
	3 - 4 pole	10-32 screw or 14-4 box lug + quad 0.25° QC
Recommended tightening torque	10-32	22 in.lbs (2.49 Nm)
	box lug	40 in.lbs (4.52 Nm)
Wire size	10-32	16-8AWG*
	box lug	14-4AWG
		* Must use ring terminals

Notes:
 * Not all part numbers are UL approved. Consult factory if required.
 ** Not all part numbers are RoHS compliant. Consult factory if required.

Ordering Code

3 0 C 2 5 - 1 0 2 3 - 1 6 7 - 5 2 3 0 - 0 0 2

Series

Contact ratings

25: 25 FLA

Contact material

10: AgCdO (standard)
 70: AgSnOInO

Contact arrangement

21: SPST-NO
 22: DPST-NO
 23: 3PST-NO
 24: 4PST-NO

Environmental protection

1: No overall cover - IP00

Coil code:

See table 2

T

Terminals

L

Terminals

Mounting & terminations

- 1: 10-32 Combi philips screw, quad QC blades
- 2: Same as 1 with sems screw and pressure plate
- 3: 14-4AWG Box lug, quad QC blades
- 4: 14-4AWG Box lug, dual QC blades (40FLA std.)
- 5: 10-32 Combi philips screw, dual QC blades (20-30FLA std.)
- 6: 14-2AWG Box lug, QC blades (50-60FLA std.)
- 7: 14-1AWG Box lug, QC blades (75-150FLA std.)

Reserved for customer specific requirements

- 001: Dual 0.25° QC blades for coil terminations
 002: 999 - Optional customer specific number


Contact Data						Table 1		
Model	Full load amps (FLA)	Poles	Line voltage (VAC)	Locked rotor amps (LRA)	Resistive amps	Max. HP		
						Voltage	1 Phase	3 Phase
30C25-1021	25	1	120	150	35	120	1	
			240 / 277	150		240	2	
			480	125				
			600	100				
30C25-1022	25	2	120	150	35	120	1	
			240 / 277	150		240	2	
			480	125				
			600	100				
30C25-1023	25	3	120	150	35	110 / 120	2	
			240 / 277	150		200 / 240	5	7.5
			480	125		480		15
			600	100		600		20
30C25-1024	25	4	120	150	35	110 / 120	2	
			240 / 277	150		200 / 240	5	7.5
			480	125		480		15
			600	100		600		20
FLA Rating tested for 30,000 cycles of endurance at 240 / 480 / 600 VAC per UL508 Resistive heat rating tested for 250,000 cycles at 277 VAC LRA Rating tested for 600 cycles of locked rotor endurance per UL508								

Coil Data						Table 2			
Voltage: 24-277VAC 50/60Hz. See coil data below. (480VAC available but not UL approved). Insulation Class: UL Class B (130°C)									
Coil Code	Rated voltage 50/60Hz	Coil resistance (Ω)	Coil operating voltage (VAC)			Minimum inrush		Nominal coil power	
			Must release	Must operate	Max. voltage	VA @ 50Hz	VA @ 60Hz	VA @ 50Hz	VA @ 60Hz
30C25-1021									
5024	24	18	6	18	30	31	28	6	5
5120	120	420	20	88	132				
5230	208 / 240	1800	40	177	264				
5277	277	2500	50	221	300				
5480	480	8000	100	380	528				
30C25-1022									
5024	24	11	6	18	30	33	30	8	6.5
5120	120	237	20	88	132				
5230	208 / 240	1000	40	177	264				
5277	277	1600	50	221	300				
5480	480	4200	100	380	528				
30C25-1023									
5024	24	7	6	18	30	65	60	7.5	6
5120	120	180	20	88	132				
5230	208 / 240	719	40	177	264				
5277	277	900	65	220	300				
5480	480	3100	150	384	520				
30C25-1024									
5024	24	6	6	18	30	62	59	9	7
5120	120	150	20	88	132				7
5230	208 / 240	600	40	177	264				6
5277	277	750	65	220	300				7
5480	480	4200	150	384	520				7


Dimensions in Inches (mm)

Fig. 1


1 Pole

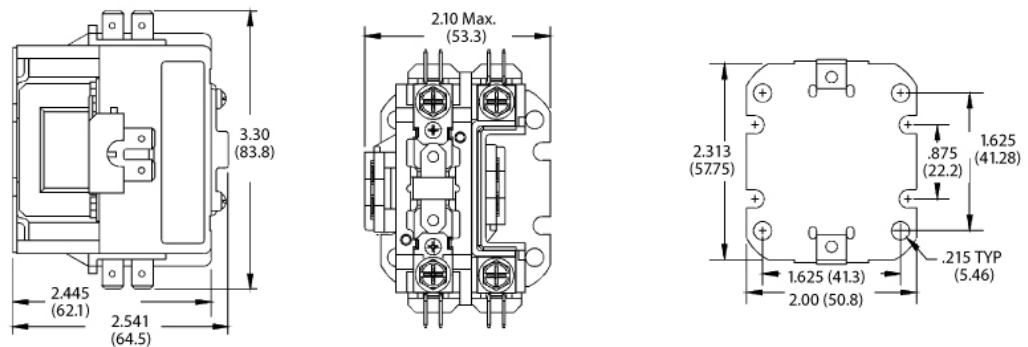


2 Pole

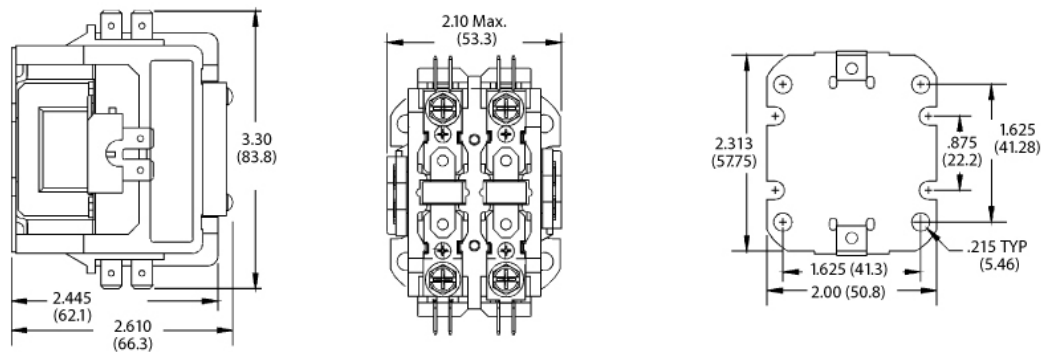

3 Pole

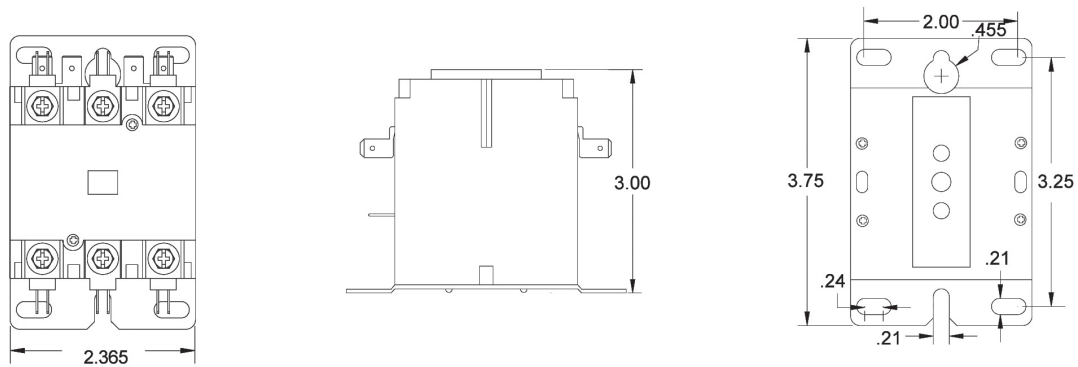

4 Pole

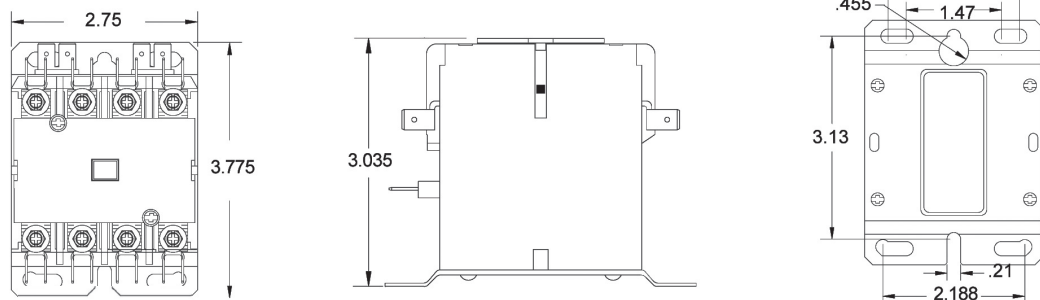

Power Terminations (Dimensions in Inches)

Fig. 2


Termination Codes: 1 & 5
Standard on 20-30FLA
10-32 combination phillips/slotted
and 5/16 hex head screw with 12 washer



Termination Code: 2
Optional on 20-40FLA
10-32 sems screw with pressure plate



Termination Codes: 3 & 4
Box Lug
14-4 AWG (Cu/Al)



Auxiliary Switches for 3 & 4 Pole Contactors

Table 3

Description	Contact arrangement	Termination	Part number
Single unit interlock configuration One on each side - max set up to two switches	SPST-NO + SPST-NC break before make	0.250" QC	30CA1Q
Single unit interlock configuration One on each side - max set up to two switches	SPST-NO + SPST-NC break before make	6-32 screw terminals	30CA1S
SPDT circuit One switch per side	SPDT	0.250" QC	30CB1Q
SPDT circuit One switch per side	2 x SPDT	0.250" QC	30CB2S


Auxiliary Switch Contact Rating

SPST-NO+SPST-NC					SPDT	
Voltage rating	120VAC	240VAC	480VAC	600VAC	120VAC	250VAC
Amps - break	3.00	1.50	0.75	0.60	0.5	0.25
Amps - make	30	15	7.5	6	15	15
Amps- continuous	10	10	10	10	10	10


Auxiliary Switch Position (side view)

Fig. 3


1 NO/NC
quick connects



1 NO/NC
screw terminals



one SPDT
switch per side



two SPDT
switches per side

