DEVR13 Series
HVDC Contactor 135A / 1000VDC

*Image is for illustrative purposes only. Please refer to datasheet for detail.

- HVDC 135A at 1000VDC
- Max. switching current = 1000A
- Contacts sealed in inert gas
- Magnet arc blowout
- Auxiliary contact option
- Female M5 power terminals

CE cULus E305753 RoHS Compliant

Contacts

Contact arrangement		SPST-NO-DM
Contact material		T2+Ag
Max. switching voltage	AC/DC	1000VDC
Rated load	DC1	135A 1000VDC (break only above 135A)
Max. continuous thermal current	600s	220A
	30s	490A
Max switching current	1 time only	1000A 450VDC
Initial contact resistance	max.	30mΩ (at 1A)
	typ.	1mΩ (at 1A)
Auxiliary contact (when fitted)	arrangement	SPST-NO (1 Form A)
	max. current	2A @ 30VDC / 3A @ 125VAC
	min. current	100mA @ 8VDC

Coil

Nominal voltage (see page 2)	DC	12~48VDC
Rated power consumption		5.5W @ 12VDC

Insulation

Insulation resistance	initial	100MΩ (min.)
	life end	50MΩ (min.)
Dielectric strength	coil to contact	3500Vrms / 10mA / 1 min (at sea level)
	contact to contact	3500Vrms / 10mA / 1 min (at sea level)

General Data

Operate time at 23°C	max.	25ms
Bounce time at 23°C	max	7ms
Release time at 23°C	max.	12ms
Electrical life	ops.	Voltage and current dependent - see fig. 1
Mechanical life	ops.	2 x 10^5

Environmental

Environmental Seal		IP67
Ambient temperature	operating	-40 to +85°C
Relative humidity		5 to 95%RH
Shock resistance		20G peak, 11ms 1/2 sine
Vibration resistance		20G sine peak (80 to 2000Hz)
Dimensions	L x W x H	40 x 54 (over flanges) x 59 mm (max.)
Weight	approx.	190g ± 5g

Ordering Code

D E V R 1 3 - 5 0 6 1 - S 8 - 1 0 1 2 - R 1 / 1

Series

Coil code:
See table 1

Contact material
50: T2+Ag

Contact arrangement
61: SPST-NO*
71: SPST-NO* + Auxiliary
* Polarised - see page 2

Mounting & terminations
Bottom flange mounting base
S8: M5 Female power terminals
Coil & auxiliary contacts by flying leads

Coil wire length
R: 15.75 (400 ±10mm) (standard)
T: 5.9" (150 ±10mm)

Coil wire & auxiliary contact termination
1: None (standard)
2: Yazaki 7282-5558-10 male, fitted to coil wires only.
3. Molex mini-fit female, fitted to coil wires only.
Other terminations to special order

Version
/1: Version 1

Specifications are subject to change without notice. E&OE.

Coil Data

Table 1

Coil code	Nominal voltage (VDC)	Must operate voltage max. (VDC at 23°C)	Max. allowable voltage (VDC)	Must release voltage min. (VDC)	Coil resistance Ω ±10% (at 23°C)	Coil current (mA)	Coil power (W at 23°C)
1012	12.0	10.2	14.4	1.2	26.0	461.5	5.5
1024	24.0	20.4	28.0	2.4	96.4	249.0	6.0
1048*	48.0	40.8	55.0	4.8	392.0	122.5	5.9

*Coil not UL approved.

Electrical Performance

Fig. 1

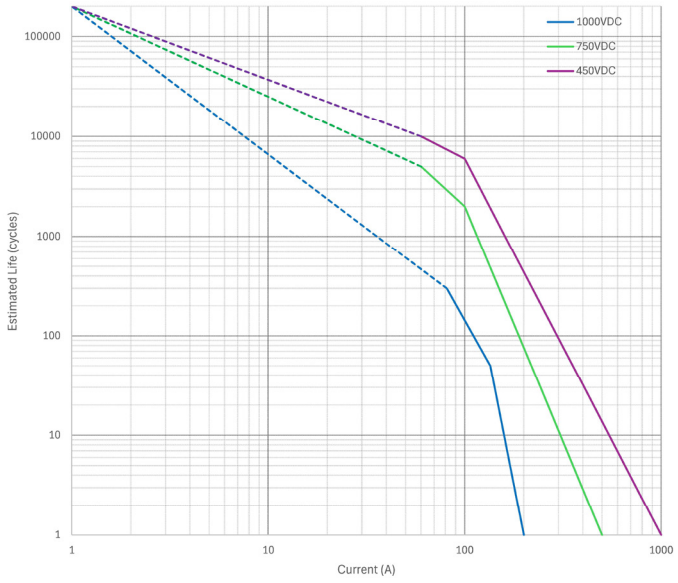

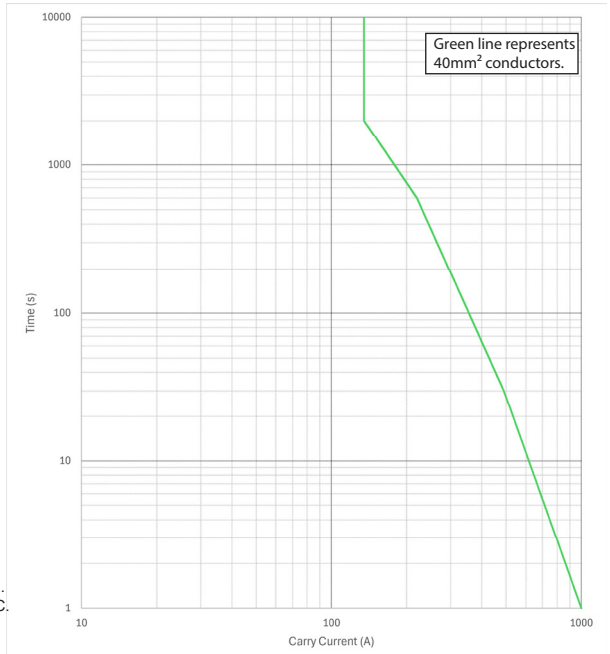

1. Estimates are based on test and extrapolated data. The user is advised to confirm performance in their application.
2. Recommended conductor size and terminal temperature rise maximum in accordance with ISO (EN) 60947.1 70°C.
3. Estimated electrical life is based on make and break current.
4. All data is based on resistive loads.

Dimensions (mm)

Fig. 2

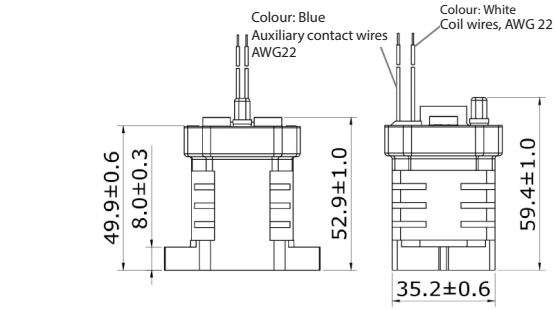



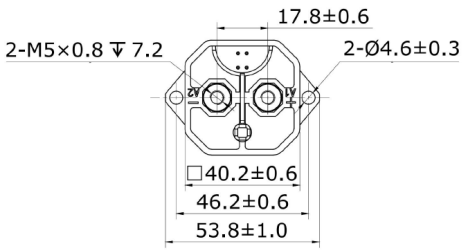

Recommended Terminal Screws (supplied):
M5 x 0.8 x 10mm
M5 spring washer
M5 flat washer

Recommended Conductor
40mm²

Torque settings
Terminals: 3.5 - 4.4Nm
Base Mounting: 1.8 - 2.5Nm

Notes:
1: Note coil is not polarised.
2: Observe contact polarity as indicated contactor life will be severely reduced if incorrectly connected.
3: Nominal dimensions in mm.
4: Tolerances (nominal), <10mm: ± 0.3mm, 10 ~ 50mm: ± 0.6mm, >50mm: ± 1.0mm.
5: Coil wire length and terminations can be customised upon request.

Circuit Diagram

Fig. 3





Power Terminals shown.

Specifications are subject to change without notice. E&OE.