



*Image is for illustrative purposes only. Please refer to datasheet for detail.

- HVDC 100A at 1000VDC
- Max. switching current = 1000A
- Contacts sealed in inert gas
- Magnet arc blowout
- Auxiliary contact option
- Female M5 power terminals



Contacts

Contact arrangement	SPST-NO-DM
Contact material	T2+Ag
Max. switching voltage	AC/DC 1000VDC
Rated load (resistive, $\cos \phi=1$)	DC1 100A 1000VDC
Max. continuous thermal current	600s 180A
	30s 450A
Max switching current	1 time only 1000A 450VDC
Initial contact resistance	max. 30mΩ (at 1A)
Auxiliary contact when fitted	arrangement SPST-NO (1 Form A)
	max. current 2A @ 30VDC / 3A @ 125VAC
	min. current 100mA @ 8VDC

Coil

Nominal voltage (see page 2)	DC 12~48VDC
Rated power consumption	hold 5.5W @ 12VDC

Insulation

Insulation resistance	initial 100MΩ (min.)
	life end 50MΩ (max.)
Dielectric strength	coil to contact 3500Vrms / 10mA / 1 min (at sea level)
	contact to contact 3500Vrms / 10mA / 1 min (at sea level)

General Data

Operate time at 23°C	max. 25ms
Bounce time at 23°C	max. 7ms
Release time at 23°C	max. 12ms
Electrical life	Voltage and current dependent - see fig. 1
Mechanical life	2 x 10 ⁵ (ON : OFF = 1s : 9s)

Environmental

Environmental Seal	IP67
Ambient temperature	operating -40 to +85°C
Relative humidity	5 to 95%RH
Shock resistance	20G peak, 11ms 1/2 sine
Vibration resistance	20G sine peak (80 to 2000Hz)
Dimensions	L x W x H 40.00 x 53.86 (over flanges) x 59.07 (approx.)
Weight	approx. 190g ±5g

Ordering Code

D E V R 1 0 - 5 0 6 1 - S 8 - 1 0 1 2 - R 1 / 1

Series

Coil code:

See table 1

Contact material

50: T2+Ag

Contact arrangement

61: SPST-NO*

71: SPST-NO* + auxiliary

* Polarised - see page 2

Mounting & terminations

Bottom flange mounting base

S8: M5 Female power terminals

Coil & auxiliary contacts by flying leads

Coil wire length

R: 14.96" (400 ±10mm) (standard)

T: 5.9" (150 ±10mm)

Coil wire & auxiliary contact termination

1: None

2: Yazaki 7282-5558-10 Male, fitted to coil wires only.

3: Molex mini-fit female, fitted to coil wires only.

Other terminations to special order

Version

/1: Version 1



Coil Data

Table 1

Coil code	Nominal voltage (VDC)	Must operate voltage max. (VDC at 23°C)	Max. allowable voltage (VDC)	Must release voltage min. (VDC)	Coil resistance $\Omega \pm 10\%$ (at 23°C)	Coil current (mA)	Coil power (W at 23°C)
1012	12.0	9.0	14.4	1.2	26.0	461.5	5.54
1024	24.0	18.0	28.0	2.4	96.4	249.0	5.98
1048	48.0	36.0	55.0	4.8	392.0	122.5	5.88

Electrical Performance


Fig. 1

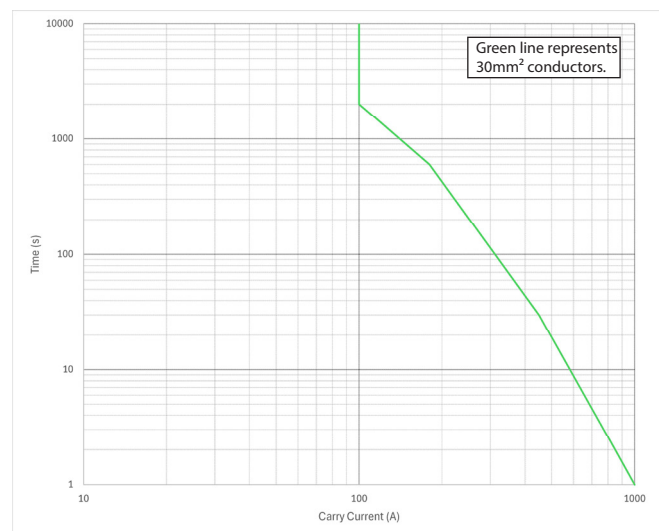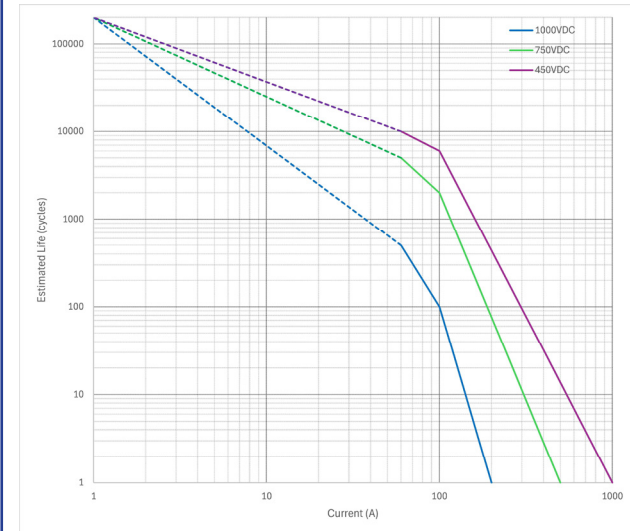

1. Estimates are based on test and extrapolated data. The user is advised to confirm performance in their application.
2. Recommended conductor size and terminal temperature rise maximum in accordance with ISO (EN) 60947.1 70°C.
3. Estimated electrical life is based on make and break current.
4. All data is based on resistive loads.

Dimensions (mm)

Fig. 2

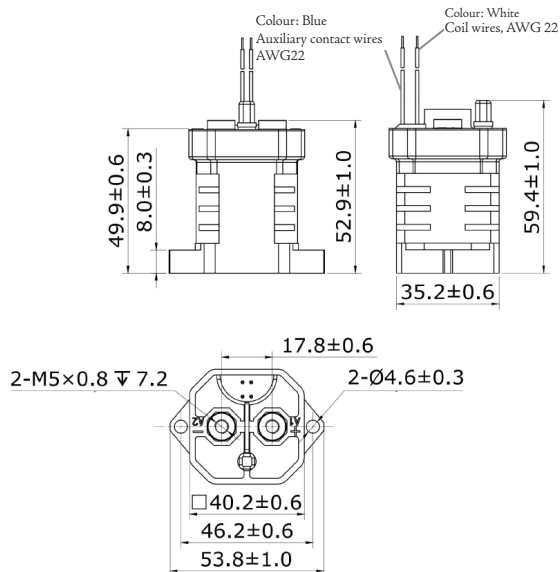

Recommended Terminal Screws
(not supplied):
M5 x 0.8 x 10mm
M5 spring washer
M5 flat washer

Recommended Conductor
30mm²


Torque settings
Terminals: 3.5 - 4.4Nm
Base Mounting: 1.8 - 2.5Nm

Notes:

- 1: Note coil is not polarised.
- 2: Observe contact polarity as indicated contactor life will be severely reduced if incorrectly connected.
- 3: Nominal dimensions in mm.
- 4: Tolerances (nominal), <10mm: ± 0.3 mm, 10 ~ 50mm: ± 0.6 mm, >50mm: ± 1.0 mm.
- 5: Coil wire length and terminations can be customised upon request.

Circuit Diagram

Fig. 3

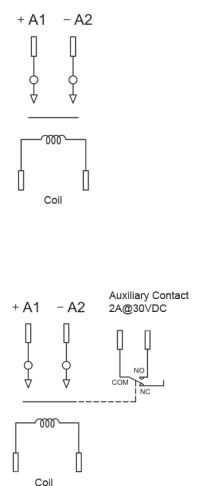

Polarised Power Terminals shown.