


NOT FOR NEW DESIGN



- 30C 50FLA Definite purpose contactor
- Robust 2 & 3 pole contactor
- Arc covers as standard
- Industry standard mounting

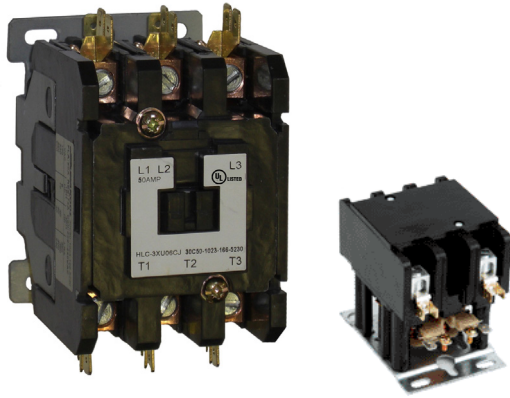

Contacts

Contact arrangement	2 Form X (DPST-NO-DM)
	3 Form X (3PST-NO-DM)
Contact material	AgCdO, AgSnOInO

General Specifications

Initial operate time	ms	30
Release time (typical)	ms	15
Bounce time	ms	≤ 10
Arc cover		standard

Insulation

Insulation system		UL Class B 130°C
Initial dielectric strength	coil to contact	2200VAC
	pole to pole	2200VAC
	between open contacts	2200VAC

Environmental

Ambient temperature	operating	-40 to +65°C	
		2 Pole	3 Pole
Weight	approx.	1.75lbs	2lbs

Terminations

Coil terminals	2 - 3 pole	0.250" QC + 6-32 screw (dual 0.25" QC optional)
		per terminal
Power terminals	screw	¼ screw (with or without sems plate)
	box lug	14-2 AWG
Recommended tightening torque	¼ - 20	40 in.lbs (4.53 Nm)
	box lug	50 in.lbs (5.65 Nm)
Wire size	¼ - 20	16-8AWG*
	box lug	14-2AWG
		* Must use ring terminals

Notes:

* Not all part numbers are UL approved. Consult factory if required.
 ** Not all part numbers are RoHS compliant. Consult factory if required.

Ordering Code

3 0 C 5 0 - 1 0 2 3 - 1 5 4 - 5 0 2 4 - 0 0 2

Series

Contact ratings

50: 50 FLA

Contact material

10: AgCdO (standard)
 70: AgSnOInO

Contact arrangement

22: DPST-NO
 23: 3PST-NO

Environmental protection

1: No overall cover - IP00

Mounting & terminations

- 1: 10-32 Combi philips screw, quad QC blades
- 2: Same as 1 with sems screw and pressure plate
- 3: 14-4AWG Box lug, quad QC blades
- 4: 14-4AWG Box lug, dual QC blades (40FLA std.)
- 5: 10-32 Combi philips screw, dual QC blades (20-30FLA std.)
- 6: 14-2AWG Box lug, QC blades (50-60FLA std.)
- 7: 14-1AWG Box lug, QC blades (75-150FLA std.)

Reserved for customer specific requirements

001: Dual 0.25" QC blades for coil terminations
 002: 999 - Optional customer specific number

T	L
Terminals	Terminals

Contact Data
Table 1

Model	Full load amps (FLA)	Poles	Line voltage (VAC)	Locked rotor amps (LRA)	Resistive amps	Max. HP		
						Voltage	1 Phase	3 Phase
30C50-1022	50	2	120	300	65	120	3	
			240 / 277	300		240	10	15
			480	250				
			600	200				
30C50-1023	50	3	120	300	65	120	3	
			240 / 277	300		240	10	15
			480	250		480		25
			600	200		600		25

FLA Rating tested for 30,000 cycles of endurance at 240 / 480 / 600 VAC per UL508

Resistive heat rating tested for 250,000 cycles at 277 VAC

LRA Rating tested for 600 cycles of locked rotor endurance per UL508


Coil Data
Table 2

Voltage: 24-277VAC 50/60Hz. See coil data below. (480VAC available but not UL approved). Insulation Class: UL Class B (130°C)

Coil Code	Rated voltage 50/60Hz	Coil resistance (Ω)	Coil operating voltage (VAC)			Minimum inrush		Nominal coil power	
			Must release	Must operate	Max. voltage	VA @ 50Hz	VA @ 60Hz	VA @ 50Hz	VA @ 60Hz

30C50-1022 & 30C50-1023

5024	24	2.4	6	18	30	138	130	18	13
5120	120	45	20	88	132				
5230	208 / 240	180	40	177	264				
5277	277	280	65	220	300				
5480	480	852	150	384	520				

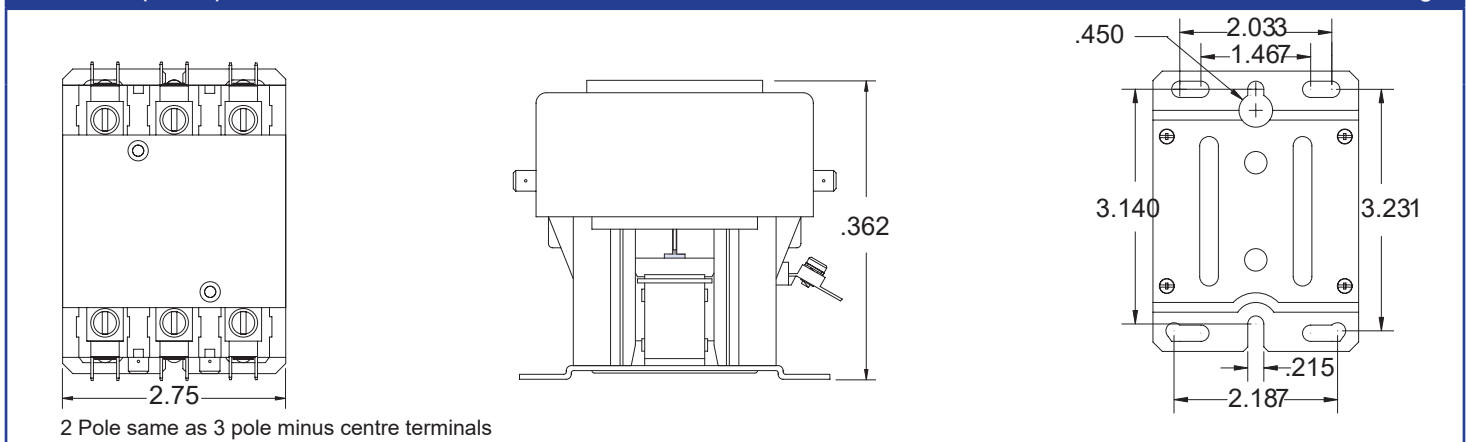Dimensions (Inches)
Fig. 1

Power Terminations (Dimensions Inches)
Fig. 2

Termination Codes: 1 & 5 Standard on 20-30FLA 10-32 combination phillips/slotted and 5/16 hex head screw with 12 washer		Termination Code: 6 Standard for 50 & 60FLA Box Lug 14-2 AWG (Cu/Al)	
Termination Code: 2 Optional on 20-40FLA 10-32 sems screw with pressure plate		Termination Code: 7 Standard for 75 & 90FLA Box Lug 14-1 AWG (Cu/Al)	
Termination Codes: 3 & 4 Box Lug 14-4 AWG (Cu/Al)			